



Dynapac DFP8X


Forward plates





Technical data

 Masses	
Basic mass	88 kg
Operating mass	90 kg

 Traction	
Max. working speed	25 m/min

 Compaction	
Frequency	93 Hz
Centrifugal force	15 kN
Amplitude	1 mm

 Engine	
Manufacturer/Model	Honda GX160
Emissions according to	Stage V & US EPA
Type	Air cooled, petrol
Number of cylinders	1
Fuel consumption /h, avg.	1.4 l
Fuel tank capacity	3.10 l
Power	3.6 kW @ 3600 rpm

 Drive system	
Drive system	Mechanical

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_dfp8x_en-20210127.045548.pdf 2021-01-27 04:55


Dynapac DFP8X

Forward plates




Technical data

STANDARD HANDLE

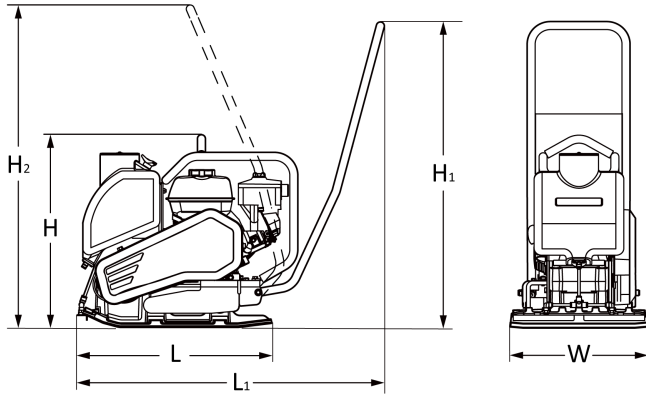

COMFORT HANDLE

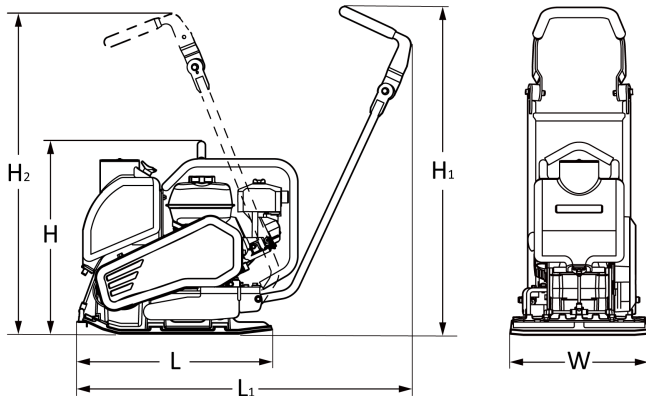

Dimensions

H. Height	630 mm
H1. Height, standard handle	945 mm
H2. Height, standard handle	980 mm
L1. Length, standard handle	970 mm
H1. Height, comfort handle	990 mm
H2. Height, comfort handle	980 mm
L1. Length, comfort handle	1070 mm
L. Length	610 mm
W. Basic plate width	430 mm



Standard equipment

- Foldable steering handle with vibration isolation
- Highly wear resistant base plate
- Automatic decompression
- All around protection for V-belt
- Protection frame for powerpack
- Recoil starter
- Carrying handles
- One point lift



Optional equipment

- Water sprinkler system 11l (+2.5kg)
- Comfort handle
- Puncture proof transport wheels (+2kg)
- Block paving mat
- Service Kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_dfp8x_en-20210127.045548.pdf 2021-01-27 04:55